

**Panasonic**  
BUSINESS

Document Scanner  
**KV-SL1066**  
**KV-SL1056**



# Smart Scan!

Various Documents Scan for Your Needs

High-Volume Scan with Durability

Smooth Scan with Reliable Feeding

**65 ppm / 130 ipm** [KV-SL1066]

**45 ppm / 90 ipm** [KV-SL1056]

(A4 / Letter, Portrait, 200 / 300 dpi)

**High-Volume, 100-sheets ADF**



## Specifications

			KV-SL1066	KV-SL1056
Scanning Face			Duplex	
Scanning Method			Colour CIS (600 dpi) / Black or White Background	
Scanning Resolution			100 - 600 dpi (1 dpi step) and 1200 dpi (interpolated) Optical: 300 dpi / 600 dpi (Automatic switch)	
Scanning Speed	Binary / Colour	Simplex	Up to 65 ppm	Up to 45 ppm
	A4 size 200 / 300 dpi	Duplex	Up to 130 ipm	Up to 90 ipm
Automatic Detection			Intelligent double feed detection using ultrasonic sensor	
Image Compression			MH, MMR, JPEG	
Binary Mode Halftone			Dither, Error Diffusion	
Image Control			Auto preview, Auto rescan, Automatic Brightness Adjustment, Multi Colour Drop Out, Dynamic Threshold, White Level From Paper, Image Emphasis, Gamma, Automatic Separation, Noise Reduction	
Other Functions			Length Control, Patchcode Detection (Type 2, 3, T), Control Sheet Detection, Long Paper, Double Feed Skip	
Documents*1	Width		48 mm - 216 mm (1.9 in. - 8.5 in.)	
	Length		Automatic feeding: 54 mm - 356 mm (2.1 in. - 14 in.) Manual feeding: 54 mm - unlimited (2.1 in. - unlimited)*3	
	Thickness		Paper 0.04 mm - 0.5 mm (1.6 mils. - 19.7 mils.) Passport*4 4.0 mm (157.5 mils.) (including carrier sheet) Note: 1 mil = 0.001 in.	
	Weight		20 g/m <sup>2</sup> - 413 g/m <sup>2</sup> (5 lb. - 110 lb.)	
Card	Format		ISO format	
	Size		85.6 mm × 54 mm (3.4 in. × 2.1 in.)	
	Thickness		0.76 mm (0.03 in.), Embossed card up to 1.4 mm (55.1 mils.)	
Feed Tray Capacity			Up to 100 sheets 80 g/m <sup>2</sup> (21 lbs., A4 or Letter) or 3 hard cards (ISO7810 ID-1)	
Supported Operating System			Windows Vista SP2 (32bit / 64bit) Windows 7 (32bit / 64bit) / Windows 8 (32bit / 64bit) Windows 8.1 (32bit / 64bit) / Windows 10 (32bit / 64bit) Windows Server® 2003 SP2 (32bit / 64bit) Windows Server® 2003 R2 SP2 (32bit / 64bit) Windows Server® 2008 SP2 (32bit / 64bit) Windows Server® 2008 R2 SP1 (64bit) Windows Server® 2012 (64bit) Windows Server® 2016 (64bit) Mac OS X 10.8 - 10.11, macOS 10.12 - 10.14, Red Hat® Enterprise Linux® Desktop 6/7, Ubuntu® 12/14/15/16/17/18/19	
Interface			USB 3.1 Gen 1 (backward compatible)	
External Dimensions (W x D x H)			300 mm x 272 mm x 238 mm (11.8 in. x 10.7 in. x 9.37 in.) (When the exit tray is closed)	
Weight			4.0 kg (8.8 lbs.)	
Power Requirement*2			AC 100 V - 125 V, 50 / 60 Hz or AC 220 V - 240 V, 50 / 60 Hz	
Power Consumption	Maximum (Scanning)		36 W or less	
	Minimum (Ready)		7 W or less	
	Sleep		1.8 W or less	
	Power off		0.3W or less (100V Type), 0.5W or less (200V Type)	
Operating Environment			Temperature: 5 - 35 °C (41 - 95 °F) / Humidity: 20 - 80 % RH	
Storage Environment			Temperature: -10 - 50 °C (14 - 122 °F) / Humidity: 8 - 75 % RH	
Accessories			CD-ROM (Device Driver, ISIS driver software, TWAIN driver software, WIA driver software, User Utility, Scan Button Setting Tool, Image Capture Plus with the OCR Engine, Operation manual, Control data sheet (PDF))	
			Quick Installation Guide, Power cord, USB cable (1.5 m (59 in.)), Mixed batch card guide	
Options	Flatbed Scanner		KV-SS081	
	Carrier sheet		KV-SS077	
	Consumables Roller exchange kit		KV-SS061	
	Roller cleaning paper		KV-SS03	

\*1 Image Size : 200dpi or less: 48 x 54 mm (1.9 x 2.1 in.) to 216 x 5,588 mm (8.5 x 220 in.)  
300dpi or less: 48 x 54 mm (1.9 x 2.1 in.) to 216 x 5,461 mm (8.5 x 215 in.)  
400dpi or less: 48 x 54 mm (1.9 x 2.1 in.) to 216 x 4,064 mm (8.5 x 160 in.)  
600dpi or less: 48 x 54 mm (1.9 x 2.1 in.) to 216 x 2,700 mm (8.5 x 106.3 in.)


\*2 The power requirement differs depending on the country/area.

\*3 Using "Long Paper", you can scan a long document to a series of split scanned images.

\*4 Use the carrier sheet (KV-SS077) to scan passport. Depending on the condition (operating environment, dirt, scratches, etc.) of the carrier sheet or passport, the image processing function may not work properly.

- All photographs in this brochure are simulated.
- Weights and dimensions are approximate.
- Specifications are subject to change without notice.
- These products may be subject to export control regulations.
- Use the mixed batch card guide when scanning mixed media (cards and papers) at the same time.
- Bound documents can be scanned by setting the manual feed selector to manual scanning (Manual). You can use an optional carrier sheet (KV-SS076) to scan passports using manual scanning.

## Dimensions

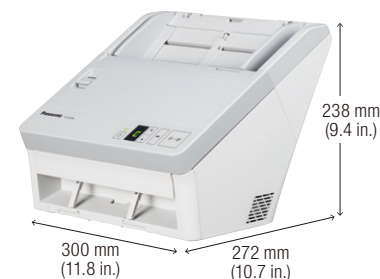

### Flatbed Scanner KV-SS081



\*100 - 600 dpi (1 dpi step) (B/W and Colour)

### Carrier sheet KV-SS077



\*3 per package

### Roller exchange kit KV-SS061



### Roller cleaning paper KV-SS03



\*10 per box



#### Trademarks and registered trademarks

- ABBYY is a registered trademark of ABBYY Software Ltd.
- ISIS is a registered trademark or trademark of Open Text Corporation.
- Windows, Windows Vista and Windows Server are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
- Mac, OS X and macOS are trademarks of Apple Inc., registered in the U.S. and other countries.
- Linux is a registered trademark or a trademark of Linus Torvalds in the United States and other countries.
- Red Hat and Red Hat Enterprise Linux are registered trademarks or trademarks of Red Hat, Inc. in the United States and other countries.
- Ubuntu is a registered trademark or a trademark of Canonical Ltd. in the United States and other countries.
- All other brand or product names are the property of their respective holders.

This product is designed to reduce hazardous chemical substances in accordance with the RoHS directive.

DISTRIBUTED BY :

# Panasonic

Document Scanner: <https://panasonic.net/cns/office/products/scanner/>